


# Instructions and care guide

## How to use the Telescopic pruner:

- The pruning head will cut up to 38mm in diameter. The saw attachment will cut up to 250mm in diameter.
- Roughly estimate the size of the branch that you wish to cut and then choose the correct cutting head according to the size of the branch.
- To use the pruning head, locate hook over the branch that you wish to cut and pull the rope downwards. Use the pruning saw for thicker branches. (see Fig 1)

## How to extend the pole:


To extend the pole, twist locking mechanism open as shown on the pole. Once the pole is at a suitable working height, turn the pole to lock into position.

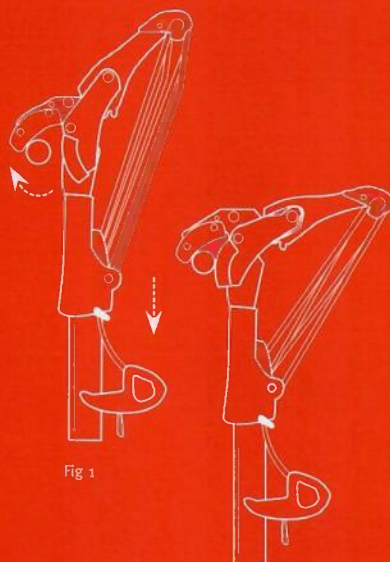

## How to attach the cutting heads to the telescopic pole:

To assemble the pruning head or saw attachment to the telescopic pole, simply place the pruning head or saw attachment onto the telescopic pole. Push the 'thumb lock' forwards and when the head or saw attachment is lined up against the holes, release 'thumb lock' to lock into position. (see Fig 2)

## Quick lock

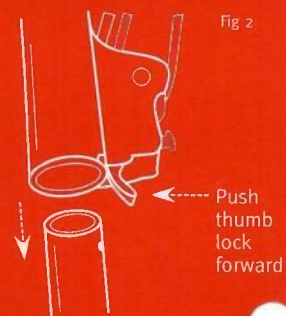

## How to attach the saw to the pruner head (for when you will need both blades at the same time):

Unscrew the 2 screws located at the handle of the saw with a Phillips head screwdriver to remove the blade from the handle. Lay the pruner head on a flat surface so that the reverse side (without the blade) is facing upwards.

Remove the wing nut and locate the saw onto the pruner head by lining up the 2 holes on the saw to the bolts and tighten wing nut to fasten into place.

### Aftercare

Wipe clean after each use and apply a little light oil to the blades and pivot points.

### Safety

Knives are sharp; please keep away from children.



**GARDMAN**

Gardman Limited, High Street,  
Moulton, Spalding, Lincolnshire,  
PE12 6QD, UK.  
Fax: +44 (0)1406 372233

**ASSEMBLY INSTRUCTIONS:**

1



Attach pruner head assembly (C) to end of pole or wooden handle (B) and line up bolt holes; secure with bolt, wing nut


2



Remove wing nut. Place saw blade over stud and threaded bolt. Secure with wing nut on threaded bolt.


**I · The step to adjust string's length:**

Step 1 pull the lock to the "Open" position and the string can be pulled down by arrow direction, as picture (1)  
Step 2 then you can adjust the grip's position smoothly, as picture (2)

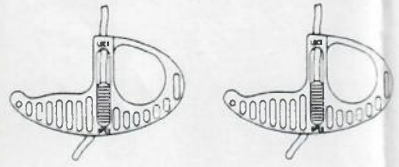


**II · The step to fix the string:**

Push the lock back to the "Lock" position and fixed, the string can never slip away

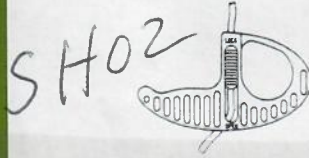

**Assembly Instruction**

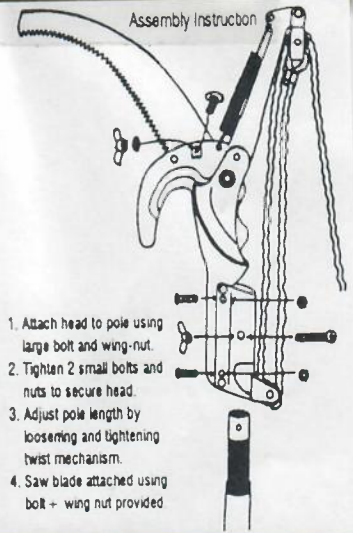

1. Attach head to pole using large bolt and wing-nut.
2. Tighten 2 small bolts and nuts to secure head.
3. Adjust pole length by loosening and tightening twist mechanism.
4. Saw blade attached using bolt + wing nut provided

tele  
tree

- ▲ For pruning difficult to reach branches of tall shrubs and trees
- ▲ Will extend to over 2.4m
- ▲ 'Quick-lock' - locking system with no screws or bolts
- ▲ Cuts stems up to 38mm in diameter
- ▲ High carbon steel coated blades for long life

